

Applications

We source and stock a wide variety of containment resources and products to provide your facility with an affordable containment solution that fits your individualized requirements.

Key Features

- o Custom made solutions for both Hot and Cold Aisles
- o Multiple options available to meet fire code compliance
- o Comes pre-sized and custom cut for fast installation



Containment Is Not A One-Size-Fits-All Enterprise

Our airflow and containment specialists realize each facility has unique needs and will collaborate with you to design a custom containment solution for your facility.

Options That Set Aisle Containment Apart:

- o Can meet any design criteria including existing and new builds with non-standard rack layouts
- o Infinitely customizable

Custom Containment • Custom designed and built specifically for your facility.

Single Pivot Door



Finish	
Standard Finish	Satin Anodize (Clear)
Upgrade Finish	Custom Anodize and Powder Coat Colors
Door and Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling - Lexan (High Optic Polycarbonate)	
Material	Polycarbonate
Color	Clear
Odor	Odorless
Thickness	4.5 mm
Self-ignition Temperature	650°F
Meets or exceeds ASTM E84	

Single Sliding Door, Manual Close



Track		
Material	6091 T-5 Temper Aluminum	
Fire Suppression Fusible Links		
Heat Activated	135°	165°
Maximum Load	40 lbs	45 lbs
Minimum Load	3 lbs	3 lbs
Clear Vinyl		
NFPA 701 passed		

Single Sliding Door, Auto Closing



Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling	
Material	15 mil Clear Polyvinyl Chloride
Color	Clear
Smoke Deviation ASTM E84	125 Test Result
Flame Spread ASTM E84	15 Test Result
Meets or exceeds ASTM E84	
UL-R4036 and FM-4651 rated for use under fire suppression system	

Double Pivot Door



Finish	
Standard Finish	Satin Anodize (Clear)
Upgrade Finish	Custom Anodize and Powder Coat Colors
Door and Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling - Lexan (High Optic Polycarbonate)	
Material	Polycarbonate
Color	Clear
Odor	Odorless
Thickness	4.5 mm
Self-ignition Temperature	650°F
Meets or exceeds ASTM E84	

Double Sliding Door, Manual Close




Finish	
Standard Finish	Satin Anodize (Clear)
Upgrade Finish	Custom Anodize and Powder Coat Colors
Door and Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling - Lexan (High Optic Polycarbonate)	
Material	Polycarbonate
Color	Clear
Odor	Odorless
Thickness	4.5 mm
Self-ignition Temperature	650°F
Meets or exceeds ASTM E84	

Double Sliding Door, Auto Close




Finish	
Standard Finish	Satin Anodize (Clear)
Upgrade Finish	Custom Anodize and Powder Coat Colors
Door and Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling - Lexan (High Optic Polycarbonate)	
Material	Polycarbonate
Color	Clear
Odor	Odorless
Thickness	4.5 mm
Self-ignition Temperature	650°F
Meets or exceeds ASTM E84	

Heat Activated Ceiling Panels

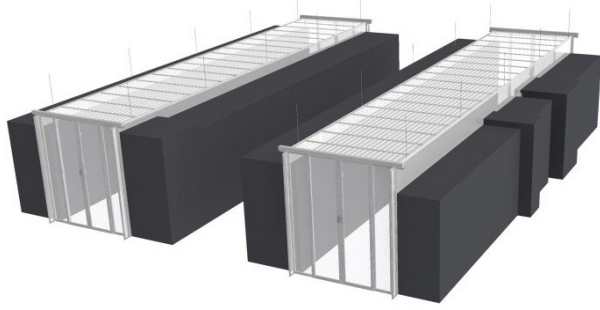

Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling	
Material	15 mil Clear Polyvinyl Chloride
Color	Clear
Smoke Deviation ASTM E84	125 Test Result
Flame Spread ASTM E84	15 Test Result
Meets or exceeds ASTM E84	
UL-R4036 and FM-4651 rated for use under fire suppression system	

Mechanical Ceiling Panels

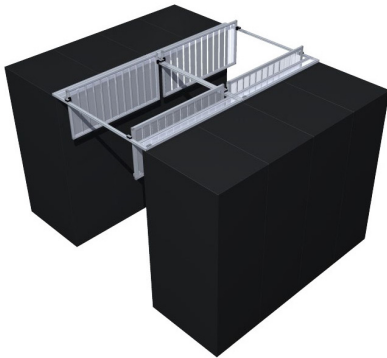


Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling	
Material	15 mil Clear Polyvinyl Chloride
Color	Clear
Smoke Deviation ASTM E84	125 Test Result
Flame Spread ASTM E84	15 Test Result
Meets or exceeds ASTM E84	
UL-R4036 and FM-4651 rated for use under fire suppression system	

Rigid Doors and Rigid Walls



Finish	
Standard Finish	Satin Anodize (Clear)
Upgrade Finish	Custom Anodize and Powder Coat Colors
Door and Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling - Lexan (High Optic Polycarbonate)	
Material	Polycarbonate
Color	Clear
Odor	Odorless
Thickness	4.5 mm
Self-ignition Temperature	650°F
Meets or exceeds ASTM E84	

Thermal Walls & Doors

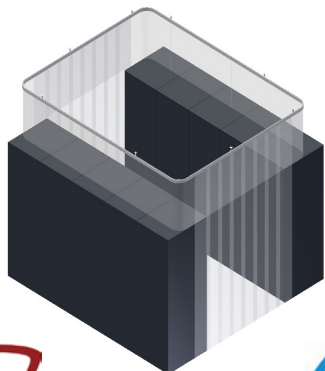

Track		
Material	6091 T-5 Temper Aluminum	
Fire Suppression Fusible Links		
Heat Activated	135°	165°
Maximum Load	40 lbs	45 lbs
Minimum Load	3 lbs	3 lbs
Clear Vinyl		
NFPA 701 passed		

